

# Chapter 6: Synchronization Tools




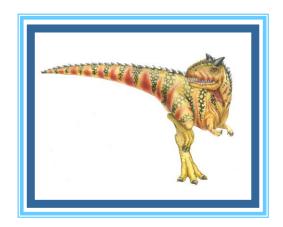

# **Chapter 6: Synchronization Tools**

- Background
- □ The Critical-Section Problem
- Peterson's Solution
- Synchronization Hardware
- Mutex Locks
- Semaphores
- Monitors





# **Objectives**

- □ To present the concept of process synchronization.
- ☐ To introduce the critical-section problem, whose solutions can be used to ensure the consistency of shared data
- To present both software and hardware solutions of the critical-section problem
- To examine several classical process-synchronization problems
- To explore several tools that are used to solve process synchronization problems






# **Background**


- Processes can execute concurrently
  - May be interrupted at any time, partially completing execution
- Concurrent access to shared data may result in data inconsistency
- Maintaining data consistency requires mechanisms to ensure the orderly execution of cooperating processes
- Illustration of the problem: Suppose that we wanted to provide a solution to the consumer-producer problem that fills all the buffers. We can do so by having an integer counter that keeps track of the number of full buffers. Initially, counter is set to 0. It is incremented by the producer after it produces a new buffer and is decremented by the consumer after it consumes a buffer.





#### **Producer**






#### Consumer

```
while (true) {
    while (counter == 0)
        ; /* do nothing */
    next_consumed = buffer[out];
    out = (out + 1) % BUFFER_SIZE;
    counter--;
    /* consume the item in next consumed */
}
```





#### **Race Condition**

counter++ could be implemented as


```
register1 = counter
register1 = register1 + 1
counter = register1
```


counter-- could be implemented as

```
register2 = counter
register2 = register2 - 1
counter = register2
```

Consider this execution interleaving with "count = 5" initially:

```
S0: producer execute register1 = counter {register1 = 5}
S1: producer execute register1 = register1 + 1 {register1 = 6}
S2: consumer execute register2 = counter {register2 = 5}
S3: consumer execute register2 = register2 - 1 {register2 = 4}
S4: producer execute counter = register1 {counter = 6}
S5: consumer execute counter = register2
```






#### **Critical Section Problem**

- Consider system of n processes  $\{p_0, p_1, \dots p_{n-1}\}$
- Each process has critical section segment of code
  - Process may be changing common variables, updating table, writing file, etc
  - When one process in critical section, no other may be in its critical section
- Critical section problem is to design protocol to solve this
- Each process must ask permission to enter critical section in entry section, may follow critical section with exit section, then remainder section






## **Critical Section**

 $\square$  General structure of process  $P_i$ 






# Algorithm for Process Pi

```
do {
     while (turn == j);
          critical section
     turn = j;
     remainder section
} while (true);
```






# **Solution to Critical-Section Problem**

- 1. Mutual Exclusion If process  $P_i$  is executing in its critical section, then no other processes can be executing in their critical sections
- 2. Progress If no process is executing in its critical section and there exist some processes that wish to enter their critical section, then the selection of the processes that will enter the critical section next cannot be postponed indefinitely
- 3. **Bounded Waiting** A bound must exist on the number of times that other processes are allowed to enter their critical sections after a process has made a request to enter its critical section and before that request is granted
  - Assume that each process executes at a nonzero speed
  - No assumption concerning relative speed of the n processes






# **Critical-Section Handling in OS**

Two approaches depending on if kernel is preemptive or nonpreemptive

- □ Preemptive allows preemption of process when running in kernel mode
- Non-preemptive runs until exits kernel mode, blocks, or voluntarily yields CPU
  - Essentially free of race conditions in kernel mode






## Peterson's Solution

- Good algorithmic description of solving the problem
- Two process solution
- Assume that the **load** and **store** machine-language instructions are atomic; that is, cannot be interrupted
- ☐ The two processes share two variables:
  - int turn;
  - Boolean flag[2]
- The variable turn indicates whose turn it is to enter the critical section
- The flag array is used to indicate if a process is ready to enter the critical section. flag[i] = true implies that process P<sub>i</sub> is ready!






# Algorithm for Process Pi

```
do {
    flag[i] = true;
    turn = j;
    while (flag[j] && turn = = j);
        critical section

    flag[i] = false;
        remainder section
} while (true);
```






# Peterson's Solution (Cont.)

- Provable that the three CS requirement are met:
  - 1. Mutual exclusion is preserved

```
P<sub>i</sub> enters CS only if:
   either flag[j] = false or turn = i
```

- 2. Progress requirement is satisfied
- 3. Bounded-waiting requirement is met






# **Synchronization Hardware**


- Many systems provide hardware support for implementing the critical section code.
- All solutions below based on idea of locking
  - Protecting critical regions via locks
- Uniprocessors could disable interrupts
  - Currently running code would execute without preemption
  - Generally too inefficient on multiprocessor systems
    - Operating systems using this not broadly scalable
- Modern machines provide special atomic hardware instructions
  - Atomic = non-interruptible
  - Either test memory word and set value
  - Or swap contents of two memory words





#### **Solution to Critical-section Problem Using Locks**






## test\_and\_set Instruction

#### Definition:

```
boolean test_and_set (boolean *target)
{
    boolean rv = *target;
    *target = TRUE;
    return rv:
}
```

- 1. Executed atomically
- 2. Returns the original value of passed parameter
- 3. Set the new value of passed parameter to "TRUE".






# Solution using test\_and\_set()

- Shared Boolean variable lock, initialized to FALSE
- Solution:





## compare\_and\_swap Instruction

#### Definition:


```
int compare _and_swap(int *value, int expected, int new_value) {
   int temp = *value;

   if (*value == expected)
        *value = new_value;

   return temp;
}
```

- 1. Executed atomically
- 2. Returns the original value of passed parameter "value"
- 3. Set the variable "value" the value of the passed parameter "new\_value" but only if "value" =="expected". That is, the swap takes place only under this condition.





# Solution using compare\_and\_swap

- Shared integer "lock" initialized to 0;
- Solution:

```
do {
    while (compare_and_swap(&lock, 0, 1) != 0)
    ; /* do nothing */
    /* critical section */
lock = 0;
    /* remainder section */
} while (true);
```





## **Bounded-waiting Mutual Exclusion with test\_and\_set**

```
do {
   waiting[i] = true;
   key = true;
   while (waiting[i] && key)
      key = test and set(&lock);
   waiting[i] = false;
   /* critical section */
   j = (i + 1) % n;
   while ((j != i) && !waiting[j])
      i = (i + 1) % n;
   if (j == i)
      lock = false;
   else
      waiting[j] = false;
   /* remainder section */
} while (true);
```






#### **Mutex Locks**

- Previous solutions are complicated and generally inaccessible to application programmers
- OS designers build software tools to solve critical section problem
- Simplest is mutex lock
- Protect a critical section by first acquire() a lock then release() the lock
  - Boolean variable indicating if lock is available or not
- Calls to acquire() and release() must be atomic
  - Usually implemented via hardware atomic instructions
- But this solution requires busy waiting
  - This lock therefore called a spinlock






# acquire() and release()

```
acquire() {
while (!available)
          ; /* busy wait */
       available = false;;
    release() {
П
       available = true;
do {
    acquire lock
       critical section
    release lock
      remainder section
 } while (true);
```





# **Semaphore**


- Synchronization tool that provides more sophisticated ways (than Mutex locks) for process to synchronize their activities.
- Semaphore S integer variable
- ☐ Can only be accessed via two indivisible (atomic) operations
  - wait() and signal()Originally called P() and V()
- □ Definition of the wait() operation

```
wait(S) {
    while (S <= 0)
        ; // busy wait
    S--;
</pre>
```

Definition of the signal() operation

```
signal(S) {
   S++;
.
```






# Semaphore Usage

- Counting semaphore integer value can range over an unrestricted domain
- □ Binary semaphore integer value can range only between 0 and 1
  - Same as a mutex lock
- Can solve various synchronization problems
- Consider  $P_1$  and  $P_2$  that require  $S_1$  to happen before  $S_2$  Create a semaphore "synch" initialized to 0

```
P1:
    S<sub>1</sub>;
    signal(synch);
P2:
    wait(synch);
    S<sub>2</sub>;
```

☐ Can implement a counting semaphore **S** as a binary semaphore






# Semaphore Implementation

- Must guarantee that no two processes can execute the wait() and signal() on the same semaphore at the same time
- Thus, the implementation becomes the critical section problem where the wait and signal code are placed in the critical section
  - Could now have busy waiting in critical section implementation
    - But implementation code is short
    - Little busy waiting if critical section rarely occupied
- Note that applications may spend lots of time in critical sections and therefore this is not a good solution







#### Semaphore Implementation with no Busy waiting

- With each semaphore there is an associated waiting queue
- Each entry in a waiting queue has two data items:
  - value (of type integer)
  - pointer to next record in the list
- Two operations:
  - block place the process invoking the operation on the appropriate waiting queue
  - wakeup remove one of processes in the waiting queue and place it in the ready queue

```
typedef struct{
  int value;
  struct process *list;
} semaphore;
```






#### Implementation with no Busy waiting (Cont.)

```
wait(semaphore *S) {
   S->value--;
   if (S->value < 0) {
      add this process to S->list;
      block();
signal(semaphore *S) {
   S->value++;
   if (S->value <= 0) {
      remove a process P from S->list;
      wakeup(P);
```






#### **Deadlock and Starvation**

- Deadlock two or more processes are waiting indefinitely for an event that can be caused by only one of the waiting processes
- □ Let S and Q be two semaphores initialized to 1

```
P_0 P_1 wait(S); wait(Q); wait(Q); wait(S); ... signal(S); signal(Q); signal(S);
```

- Starvation indefinite blocking
  - A process may never be removed from the semaphore queue in which it is suspended
- Priority Inversion Scheduling problem when lower-priority process holds a lock needed by higher-priority process
  - Solved via priority-inheritance protocol






# **Problems with Semaphores**

- Incorrect use of semaphore operations:
  - □ signal (mutex) .... wait (mutex)
  - wait (mutex) ... wait (mutex)
  - Omitting of wait (mutex) or signal (mutex) (or both)
- Deadlock and starvation are possible.





#### **Monitors**


- A high-level abstraction that provides a convenient and effective mechanism for process synchronization
- Abstract data type, internal variables only accessible by code within the procedure
- Only one process may be active within the monitor at a time
- But not powerful enough to model some synchronization schemes

```
monitor monitor-name
{
    // shared variable declarations
    procedure P1 (...) { ..... }


    procedure Pn (...) { ......}

    Initialization code (...) { ... }
}
```






#### **Schematic view of a Monitor**

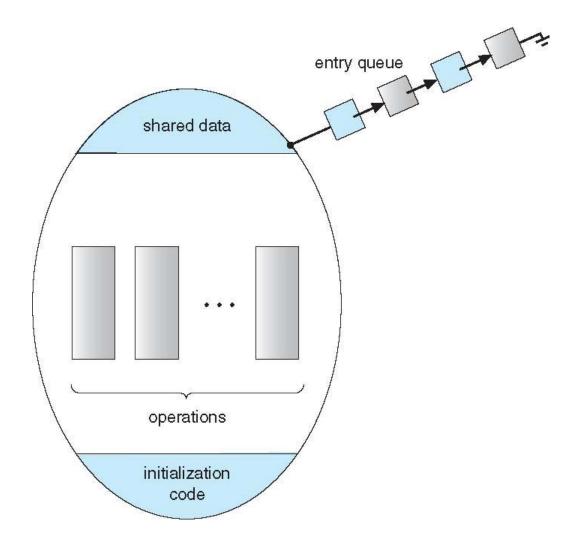







#### **Condition Variables**

- condition x, y;
- ☐ Two operations are allowed on a condition variable:
  - x.wait() a process that invokes the operation is
     suspended until x.signal()
  - material x.signal() resumes one of processes (if any) that invoked x.wait()
    - If no x.wait() on the variable, then it has no effect on the variable





#### **Monitor with Condition Variables**

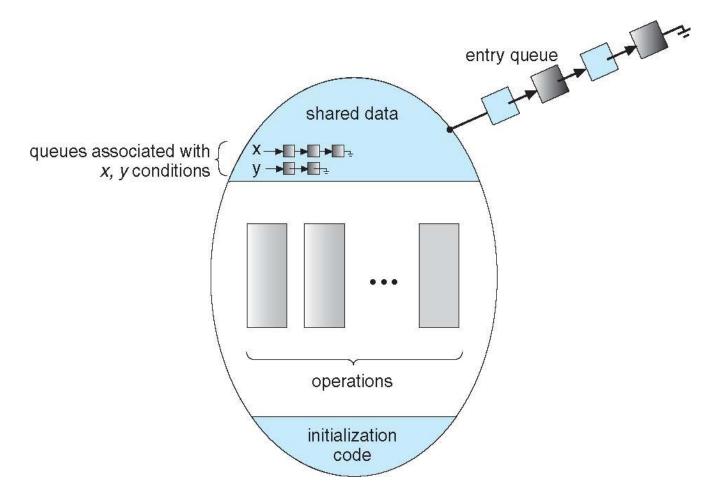





#### **Condition Variables Choices**

- If process P invokes x.signal(), and process Q is suspended in x.wait(), what should happen next?
  - Both Q and P cannot execute in paralel. If Q is resumed, then P must wait
- Options include
  - Signal and wait P waits until Q either leaves the monitor or it waits for another condition
  - Signal and continue Q waits until P either leaves the monitor or it waits for another condition
  - □ Both have pros and cons language implementer can decide
  - Monitors implemented in Concurrent Pascal compromise
    - P executing signal immediately leaves the monitor, Q is resumed
  - Implemented in other languages including Mesa, C#, Java





# **Monitor Implementation Using Semaphores**

Variables


```
semaphore mutex; // (initially = 1)
semaphore next; // (initially = 0)
int next_count = 0;
```

Each procedure F will be replaced by

```
wait(mutex);
...
body of F;
...
if (next_count > 0)
  signal(next)
else
  signal(mutex);
```

Mutual exclusion within a monitor is ensured





## **Monitor Implementation – Condition Variables**


For each condition variable x, we have:

```
semaphore x_sem; // (initially = 0)
int x_count = 0;
```

The operation x.wait can be implemented as:

```
x_count++;
if (next_count > 0)
    signal(next);
else
    signal(mutex);
wait(x_sem);
x count--;
```





# **Monitor Implementation (Cont.)**

The operation x.signal can be implemented as:

```
if (x_count > 0) {
   next_count++;
   signal(x_sem);
   wait(next);
   next_count--;
}
```






# **Resuming Processes within a Monitor**

- If several processes queued on condition x, and x.signal() executed, which should be resumed?
- FCFS frequently not adequate
- conditional-wait construct of the form x.wait(c)
  - Where c is priority number
  - Process with lowest number (highest priority) is scheduled next





# Single Resource allocation

Allocate a single resource among competing processes using priority numbers that specify the maximum time a process plans to use the resource

```
R.acquire(t);
...
access the resurce;
...
R.release;
```

Where R is an instance of type ResourceAllocator





# A Monitor to Allocate Single Resource

```
monitor ResourceAllocator
   boolean busy;
   condition x;
   void acquire(int time) {
            if (busy)
               x.wait(time);
           busy = TRUE;
   void release() {
           busy = FALSE;
            x.signal();
initialization code() {
    busy = FALSE;
```



# **End of Chapter 6**

